


## High voltage capacitors Type 2

### Type HK

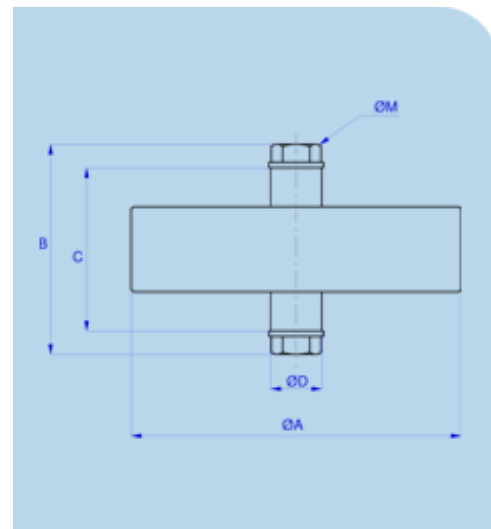

### Characteristics

ELECTRICAL CHARACTERISTIC							DIMENSIONS				
References	Capacity pF ± 10%	ε r	Voltage		Nominal reactive power (kVar)	Nominal R.M.S intensity (A)	øA (+3mm)	B (+3mm)	C (+3mm)	øD (+3mm)	øM
			Un (kVc)	Utest (kVdc)							
<b>40 441 315</b>	500 pF	3500	20	40	0,2 kVar	2 A	25	47	37	8	5
<b>40 442 315</b>	1000 pF	3500	20	40	0,3 kVar	2 A	25	42	32	8	5
<b>40 443 315</b>	2000 pF	3500	20	40	0,3 kVar	2 A	35	44	34	8	5
<b>40 480 316</b>	3000 pF	3500	30	60	0,5 kVar	3 A	49	67	53	15	8
<b>40 738 836</b>	4700 pF	3500	3,5	7,5	1 kVar	15 A	40		21 +4		6
<b>40 444 316</b>	5000 pF	3500	20	40	0,5 kVar	5 A	54	63	49	15	8
<b>40 735 836</b>	6800 pF	3500	3,5	7,5	1 kVar	15 A	40		21 +4		6
40 445 316	10000 pF	3500	20	40	1 kVar	8 A	72	62	48	15	8
40 446 316	20000 pF	3500	20	40	1 kVar	8 A	97	62	48	15	8
40 448 316	25000 pF	3500	20	40	1,5 kVar	8 A	97	62	48	15	8
40 450 316	40000 pF	3500	15	30	1,5 kVar	8 A	125	48	34	15	8
40 447 316	100000 pF	3500	5	10	1,5 kVar	8 A	125	48	34	15	8

Plan

